

August®

User Manual

EP800



August International Ltd.

Rawmec Business Park
Hoddesdon EN11 0EE
United Kingdom
Tel: +44(0) 845 250 0586

EU Distributor:
Daffodil Germany GmbH
Bayernstr. 10
D-30855 Langenhagen
Germany
Tel: +49 (0) 511 97812978
www.augustint.com

EN Ultra Portable Lightweight Bluetooth Earphones

FR Écouteurs Bluetooth Ultra Portables et Légers

DE Ultra Leichte und Portable Bluetooth-Kopfhörer

IT Auricolari Bluetooth Ultra Portatili e Legeri

ES Auriculares Bluetooth Ultra Portátil de Peso Ligerio

User Manual

Thank you for purchasing the August Ep800 Ultra Portable Lightweight Bluetooth Earphones. This user manual is designed to familiarize you with all the features of this device. Please take the time to read this user manual carefully, even if you are already familiar with a similar product.

Safety

To ensure the safety of you and others, please read the Safety Instructions before using this device. Please do not disassemble the EP800, it can be unsafe and will invalidate the manufacturer's warranty.

Disposal

Please ensure the product and accessories are disposed of in compliance with the WEEE (Waste Electrical and Electronic Equipment) Directive and any other regulations applicable to your country. Always check with the environment agency and any other relevant authorities for current disposal regulations.

Declaration of Conformity







The Declaration of Conformity can be found on our website at <http://augustint.com/en/declaration/>

Customer Service

You can contact us by phone on: +44 (0)845 250 0586 or by email at: service@augustint.com should you require further technical support or customer service.



1. Safety Instructions

■ Storage and Use

| | | | |
|--|---|---|---|
|  | <p>Do not store or use this device in extreme temperatures.</p> |  | <p>Do not store or use this device in wet or damp environments.</p> |
|  | <p>Do not expose this device to dust, oil or smoke.</p> |  | <p>Do not drop or strike this device.</p> |
|  | <p>When transporting this device store securely to avoid impact damage.</p> |  | <p>Do not scratch this device with sharp objects.</p> |

■ Maintenance


Please unplug all leads before cleaning this device.

| | | | |
|--|---|---|---|
|  | <p>Wipe the device and buttons with a soft cloth.</p> |  | <p>Never wipe this device with an abrasive cloth or apply detergent, alcohol or chemical based cleaning products.</p> |
|--|---|---|---|


2. Main Features

- Sweatproof IPX6 Bluetooth v5.0 Earphones
- In-Ear Design for Enhanced Comfort and Discretion
- Charging Carry Case for up to 30 Hours Play Time
- Integrated Mic for Calls and Voice Assistant
- Automatic Bluetooth Reconnection Compatible with Apple iOS and Android

3. Box Contents

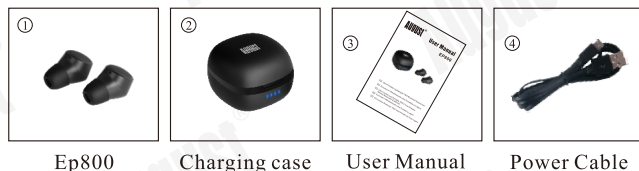

4. Part Names and Functions

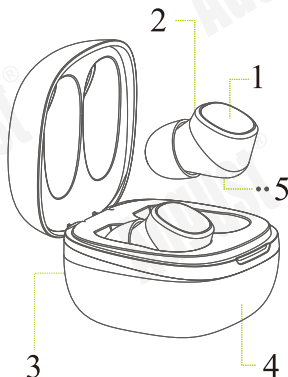

- 1.Power / Play / Pause / Answer
- 2.Status LED / Microphone
- 3.Power Socket
- 4.Battery Indicator
- 5.Pogo Pins

| Indication | LED Status |
|-------------------------|--|
| Power On / Connecting | Left LED Flashing white and red, Right LED off |
| Power On / Reconnecting | Left LED Flashing white, Right LED off |
| Paired | Left and Right LED off |
| Low Battery | Battery Indicator indicate one bar |
| Charging | LED Red / Battery Indicator Flashing |
| Fully Charged | Battery Indicator indicate four bars |

5. Operation

5.1 First Use

Take out both earphones then re-insert them back into the case to activate the earphones.

If headphones fail to be charged, please charge the charging case (for details, please refer 5.2).

Take out both earphones then re-insert them back into the case to activate the earphones, The EP800 will enter connection mode and the left status LED will flashes white and red.

5.2 Power

Please fully charge the EP800 before first use or if left unused for a long period of time.

To charge earphones, put earphones into the charging case. While charging, two status LED lights red and turns off once fully charged. To charge the charging case, use the power cable to connect the charging case to a powered USB port.

The battery indicator flash one bar and turn to four bars once fully charged. While charging, the battery indicator flash one bar and turn to four bars once fully charged.

5.3 Switch On / Off

5.3.1 Switch On / Off by charging case

To switch on the EP800, take out both 2 earphones from the charging case. The EP800 will enter reconnection mode and the left status LED will flash white.

To switch off the EP800, insert both 2 earphones back into the charging case.

5.3.2 Switch On / Off by earphones (when earphones not in the charging case)

To switch on the EP800, press and hold Power Button for 1 second. The EP800 will enter reconnection mode and the left status LED will flash white.

To switch off the EP800, press and hold Power Button for 5 second.

5.4 Bluetooth Connections

The EP800 will enter reconnection mode after switching on and will connect to any previous known device automatically. For first connection, please refer 5.1 First use. To pair to a new device, insert earphones back into the charging case, then disconnect the EP800 from your old device. Take earphones from the charging case again. The left status LED will flash white for around 30 seconds at first, and the left status LED will flash white and red alternately which indicate EP800 enter pairing mode.

-For mobile phones and tablets

- 1.Scan for available Bluetooth device on your mobile phone or tablets. (Please consult your device's user manual if necessary)
- 2.Select 'EP800.L' from the available devices and confirm the connection.
- 3.Once successfully connected, the status LED will turn off.

-For computers

- 1.Enable the Bluetooth function on your computer.
- 2.Select 'Device and Printers' from the Control Panel and click 'Add a Device'.
- 3.Select 'EP800.L' from the available devices, the system will automatically install the driver automatically. If a pin code is requested, please enter the code '0000'.
- 4.Once successfully paired and connected, the status LED will turn off.

5.5 Resetting

Please try the following steps if fail to connect with the mobile device

Take out two earphones, press and hold the power button for 5 seconds to turn off the earphones. Two LED turn off. Press two power buttons for 10 seconds, two LED will flash white and red, then both turn off. Put two earphones back to the charging case. And then take them out from the charging case again, The EP800 will enter connection mode. Connect your device with EP800.

5.6 Remote Control

Press the button to answer the phone call.

Press the button again to hang up the phone call.

Press and hold the button for 1 second to decline the phone call.

Under the calling status, press and hold the button for 1 second to switch audio output between device and earphones.

Under the calling status, press the button twice to turn on or off the Mute function.

Press the button to play or pause the music.

Press the button twice to play the next song.

Press the button for 3 times to play the previous song.

Under the standby status, press the button for 3 times to active the voice assistant.

Under the standby status, press the button for 4 times to dial the last calling number.

6. Charging

To charge earphones, put earphones into the charging case. While charging, two status LED lights red and turns off once fully charged. To charge the charging case, use the power cable to connect the charging case to a powered USB port.

While charging, the battery indicator flash one bar and turn to four bars once fully charged. A full charge takes approximatively 1.5 hours depending on power input.

Note:

- 1)When charging the EP800, ensure that the output voltage from the USB port or charger is 5V. Using a voltage greater than 5V may damage the earphones.
- 2)Please fully charge the EP800 before first use or if left unused for a long period of time.
- 3)If you are using a smart USB charger, use the common USB port, ensuring that the output voltage is 5V.

7. Specification

| | |
|----------------------------|----------------------------|
| Bluetooth Specification | V5.0 |
| Operating Range | Up to 15m |
| Frequency Response | 2.40GHz-2.48GHz |
| Support Profile | HSP/HFP/A2DP/AVRCP |
| Battery Type | Built-in Li-Polyme Battery |
| Charging Voltage | 5V |
| Earphones Battery capacity | 50mAh*2 |
| Charging case capacity | 550mAh |
| Continuous working time | 4-5 hours |

| | |
|-------------------------|------------|
| Standby time | 30 days |
| Charging time | 1-2 hours |
| Earbuds Dimension | 27*18*15mm |
| Charging case Dimension | 44*44*35mm |
| Earphones Weight | 3.5g*2 |

8. Troubleshooting

| Problem | Solution |
|--|--|
| Won't turn on. | Please charge the EP800. |
| Can't find the EP800. | Confirm the EP800 is in pairing status and within 10 meters from the device. |
| Can't install the driver for EP800 on a computer. | Update the driver of the Bluetooth module on your computer. |
| The sound quality is intermittent in Bluetooth mode. | Disable the Wi-Fi on your source device. |
| No sound. | Check the volume on the source device. |
| Not charging | Ensure that the output voltage of the USB port or charger is 5V. Use a different 5V USB charging port. |

9. Warranty

This product is guaranteed for twelve months from the date of the original purchase. In the unlikely event of any defect arising due to faulty materials or workmanship, the unit will be either replaced or repaired free of charge (where possible) during this period. An alternative product will be offered in case the product is no longer available or repairable.

This warranty is subject to the following conditions:

- The warranty is only valid within the country where the product is purchased.
- The product must be correctly installed and operated in accordance to the instructions given in this user manual.
- The product must be used solely for domestic purposes.
- The warranty only covers the main unit, and does not cover the accessories.
- The warranty does not cover the damage caused by misuse, negligence, accident and natural disaster.
- The warranty will be rendered invalid if the product is resold or has been damaged by inexpert repairs. The manufactures disclaim any liability for incidental or consequential damages.
- Please consult our customer adviser before returning any product; we are not responsible for any unexpected product returns.
- Any faulty product must be kept and returned in the original packaging with all the accessories and the original copy of the purchase receipt.

The warranty is in addition to, and does not diminish, your statutory or legal rights.

Customer Service:

Telephone: +44 (0) 845 250 0586

Email: service@augustint.com

This product is in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU. The Declaration of conformity may be consulted online at <http://www.augustint.com/en/declaration>



Industry Canada Statement

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept interference, including interference that may cause undesired operation of the device.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

No Unauthorized Modifications: Do not make any changes or modifications to this product without the prior express written approval of August International Ltd. Any changes or modifications made without express written approval could void the user's authority to operate this product.



For details of further relevant technical standards, please contact us at the address above.