

August[®]

User Manual

EP810



August International Ltd.

Rawmec Business Park
Hoddesdon EN11 0EE
United Kingdom
Tel: +44(0) 845 250 0586

EU Distributor:
Daffodil Germany GmbH
Bayernstr. 10
D-30855 Langenhagen
Germany
Tel: +49 (0) 511 97812978
www.augustint.com

- EN** Ultra Portable Lightweight Bluetooth Earphones
- FR** Écouteurs Bluetooth Ultra Portables et Légers
- DE** Ultra Leichte und Portable Bluetooth-Kopfhörer
- IT** Auricolari Bluetooth Ultra Portatili e Legeri
- ES** Auriculares Bluetooth Ultra Portátil de Peso Ligero

User Manual

Thank you for purchasing the August Ep810 Ultra Portable Lightweight Bluetooth Earphones. This user manual is designed to familiarize you with all the features of this device. Please take the time to read this user manual carefully, even if you are already familiar with a similar product.

Safety

To ensure the safety of you and others, please read the Safety Instructions before using this device. Please do not disassemble the EP810, it can be unsafe and will invalidate the manufacturer's warranty.

Disposal

Please ensure the product and accessories are disposed of in compliance with the WEEE (Waste Electrical and Electronic Equipment) Directive and any other regulations applicable to your country. Always check with the environment agency and any other relevant authorities for current disposal regulations.

Declaration of Conformity







The Declaration of Conformity can be found on our website at <http://augustint.com/en/declaration/>

Customer Service

You can contact us by phone on: +44 (0)845 250 0586 or by email at: service@augustint.com should you require further technical support or customer service.


1. Safety Instructions

■ Storage and Use

	Do not store or use this device in extreme temperatures.		Do not store or use this device in wet or damp environments.
	Do not expose this device to dust, oil or smoke.		Do not drop or strike this device.
	When transporting this device store securely to avoid impact damage.		Do not scratch this device with sharp objects.

■ Maintenance

Please unplug all leads before cleaning this device.

	Wipe the device and buttons with a soft cloth.		Never wipe this device with an abrasive cloth or apply detergent, alcohol or chemical based cleaning products.
---	--	--	--

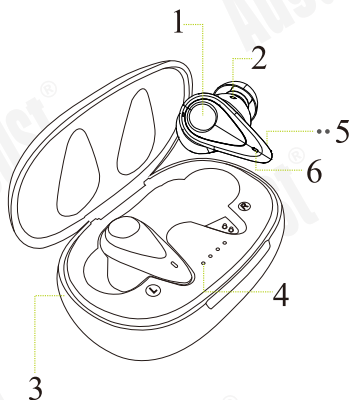
2. Main Features

- Type-C Charging Port Bluetooth v 5.0 Earbuds
- In-Ear Design for enhanced comfort and discretion
- Charging Carry Case working time up to 18 Hours
- Multi-function Button and Integrated Mic for Calls and Voice Assistant
- Automatic Bluetooth Reconnection Compatible with Apple iOS and Android

3. Box Contents



4. Part Names and Functions



- 1 Multi-function Button (Power / Play / Pause / Answer)
- 2 Microphone
- 3 Power Socket
- 4 Battery Indicator
- 5 Pogo Pins
- 6 Status LED

Indication	LED Status
Power On	Both LED Flashing blue 3 times
Power Off	Both LED Flashing red once, then turn off
Pairing	Left LED Flashing blue and red,
Paired	Left LED off, Right LED Flashing blue once
Repairing	Both LED off
Low Battery	Right LED flashing blue and red
Charging	LED Red / Battery Indicator turn on
Fully Charged	LED off/ Battery Indicator indicate four bars

5. Operation

5.1 First Use

Take out both earbuds then re-insert them back into the case to activate the earbuds. Charge the both earbuds fully before first use (for details, please refer 6)..

If earbuds fail to be charged, please charge the charging case (for details, please refer '5.2 Charging'). Take out both earbuds, The EP810 will automatically pair with each other and enter connection mode after power on, and the left status LED will flashes blue and red.

5.2 Charging

Please fully charge the EP800 before first use or if left unused for a long period of time.

To charge earbuds, put earbuds into the charging case. While charging, two status LED lights red and turns off once fully charged.

To charge the charging case, plug the Type-C charging cable to the battery case port to start charging. The battery indicator will show the current power ratio, and all the four indicators will be on after fully charged.

5.3 Switch On / Off

Both earbuds will turn on automatically when the charging case is opened or when the Multi-function Buttons have been pressed for 5 seconds. Both LEDs will flash blue 3 times.

The both earbuds will turn off automatically when placed back into the charging case and the charging case is closed or when the Multi-function Buttons have been pressed for 5 seconds. Both LEDs will flash red once.

5.4 Bluetooth Connections

The EP810 will enter reconnection mode when on. When connected to the same smartphone or Bluetooth Device, the EP810 will automatically activate. For first connection, please refer '5.1 First use'. To pair to a new device, insert earbuds back into the charging case, then disconnect the EP800 from your old device. Both status LEDs will flash blue once, and the left status LED will flash blue and red alternately which indicate that the EP810 is in pairing mode.

-Twin earbuds pairing

Open the cover of charging case or take the both earbuds out of the charging case. The earbuds will automatically pair with each other. The EP810 will enter pairing mode automatically, the LED of the left earbuds flashes blue and red. Look for the Bluetooth name "EP810" on your device and select it. Once successfully paired, the left LED will turn off and the Right LED Flashing blue once.

-Single earbud pairing

When using a single earbud, press the Multi-function Button for 5 seconds to turn on an earbud and the blue indicator will flash 3 times.

5.5 Earbuds Operation

Button	Action	Function
Left/Right	Double Click	Pause/Play music
Left/Right	Long press for 2s	Voice Assistant
Right	One Click	Volume increase
Left	One Click	Volume decrease
Right	triple click	Next track
Left	triple click	Previous track
Left/Right	Click twice	Answer call
Left/Right	Click twice	End call
Left/Right	Long press for 2s until beep	Reject call

6. Specification

Bluetooth Version	v5.0
Chipset	Airoha 1536U
Support profiles	A2DP/HFP/HSP/AVRCP
Frequency	2.4 GHz-2.48 GHz
Transmission distance	10 meters
Driver units	10 mm
Sensitivity	105±3dB S.P.L at 1KHZ
Impedance	32 ohms
Earbuds Battery capacity	50mAh*2
Charging case capacity	300mAh
Working time	Up to 16 hours
Standby time	30 days
Charge port	Type C
Charging time	1-2 hours
Earbuds Weight	3.5g
With Box Weight	40.5g
Earbuds Dimension	27*18*15mm
Charging Dimension	44*44*35mm

7. Warranty

This product is guaranteed for twelve months from the date of the original purchase. In the unlikely event of any defect arising due to faulty materials or workmanship, the unit will be either replaced or repaired free of charge (where possible) during this period. An alternative product will be offered in case the product is no longer available or repairable.

This warranty is subject to the following conditions:

- The warranty is only valid within the country where the product is purchased.
- The product must be correctly installed and operated in accordance to the instructions given in this user manual.
- The product must be used solely for domestic purposes.
- The warranty only covers the main unit, and does not cover the accessories.
- The warranty does not cover the damage caused by misuse, negligence, accident and natural disaster.
- The warranty will be rendered invalid if the product is resold or has been damaged by inexpert repairs. The manufactures disclaim any liability for incidental or consequential damages.
- Please consult our customer adviser before returning any product; we are not responsible for any unexpected product returns.
- Any faulty product must be kept and returned in the original packaging with all the accessories and the original copy of the purchase receipt.

The warranty is in addition to, and does not diminish, your statutory or legal rights.

Customer Service:

Telephone: +44 (0) 845 250 0586

Email: service@augustint.com

This product is in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU. The Declaration of conformity may be consulted online at <http://www.augustint.com/en/declaration>



Industry Canada Statement

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept interference, including interference that may cause undesired operation of the device.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

No Unauthorized Modifications: Do not make any changes or modifications to this product without the prior express written approval of August International Ltd. Any changes or modifications made without express written approval could void the user's authority to operate this product.



For details of further relevant technical standards, please contact us at the address above.